



COMA GROUP(HONG KONG)CO.,LTD

Guangzhou COMA Electronics Co.,Ltd

Add: 7th floor,Lanbaoxing Building,No.333 Nansha Avenue,Nansha District, Guangzhou ,China 511400

Mobile/whatsapp: 0086 1392 5025 788 Wechat/Skype:1392 5025 788 QQ: 12901 92481

Tel : 0086 20 6667 4688 Fax: 0086 20 6667 4689 Email:wilson@cn-coma.com




Website :http://www.coma-carparking.com/

QUOTATION



2018~2019

Stainless Steel Automatic Rising Bollard

SN#	NO.	Description	Picture	configuration	QTY	Unit	EXW Price (US Dollar)	Specification
1	CM Bollard	Electric Hydraulic Automatic Bollard (can integrate with loop detector)	  	Cylinder with LED and 3M Radium strips 30mm(2 pcs) Holder of Cylinder Hydraulic Pressure Integration Control Box(one control box max control 10 sets bollard) Draining system(Optional)	1	set	(depend on the specific configuration) MOQ:3 sets	1. Diameter: 168mm,219mm,275mm,324mm 2. Ascending Height : 600mm,700mm,800mm 3. Thickness of Cylinder: 6mm,8mm,10mm 4. N.W:180 kgs (396 Pounds) 5. Dimension of holder:500*500*1130mm 6.Control system : Electric Hydraulic system 7.Max passing pressure: 80 tons truck 8.Motor Power Supply: 110V/220V((±10%),AC 50/60Hz (Control power 24V) 9. Rated Power:2.2KW,3.7KW,5.5KW 10.PLC: Americal Original Chip 11.Up/Down speed : 3S-5S (adjustable) 12.Working temperature: -25℃~75℃

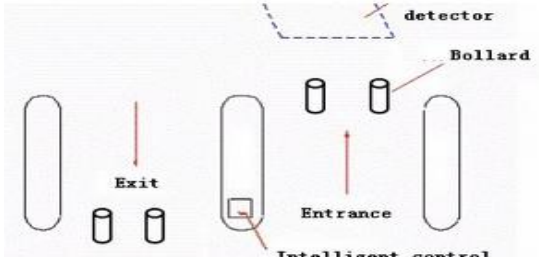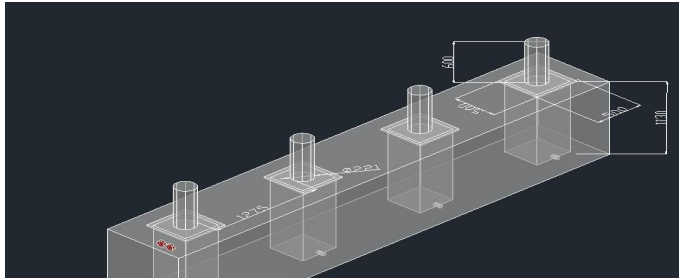
			 Loop detector and coil (Optional)		13.Material : Stainless steel Tube and A3 steel 14.Hydraulic cylinder:HOB63-600CA+I (industrial grade) 15. Pump Type: Vane Pump 16.Oil Container: 6 litres 17.IP68 18.Anti Impact standard 15K Joule
2		Application	Supermarket,walking street, park,company, parking lot,school,private villas, luxurious club,gymnasium,seaport, industrial park,airport,embassy,prison,police office, government sector, safety zone, millitry zone(base) etc.	Advantages	1.Solid and endureable structure and can combining with barrier gate(loop detector) for vehicle access control 2. 24V control power,more safe then 110V/220V/380V 3. Multiple control option: manual button,remote control,conning with other equipment,for example,barrier gate 4. Low-pressure hydraulic driving mode making the barrier Low trouble rate, high reliability, long life 5. Easy to install and maintenance
3		 			

4	

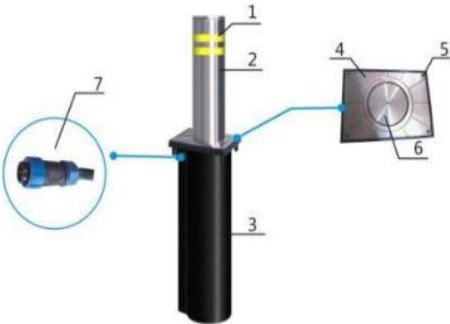

Part

1	3M Reflective Strip
2	Stainless Steel Cylinder
3	Holder of Cylinder
4	Flange
5	Anti-theft Bolt
6	Cover of Holder
7	Juction Tap

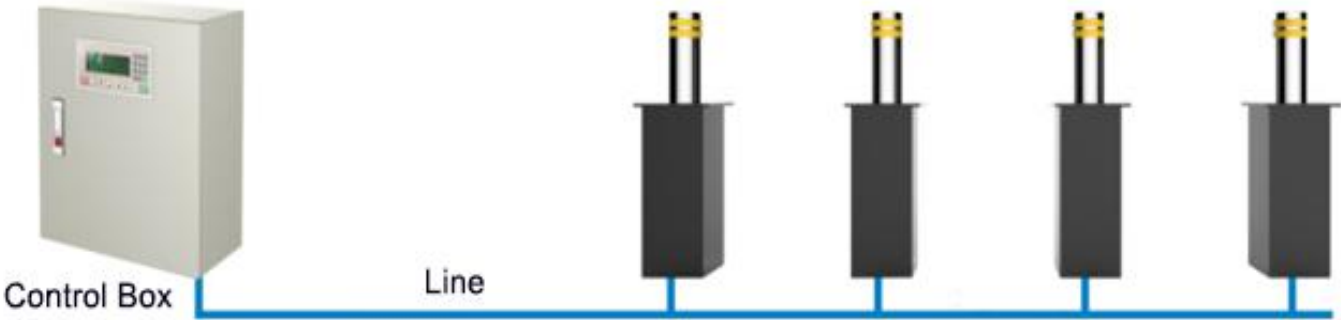

REMARKS:

1. Above showed Pictures just for reference only ,in the condition of ensuring same function performance,final products maybe minor difference(color or dimension etc)

